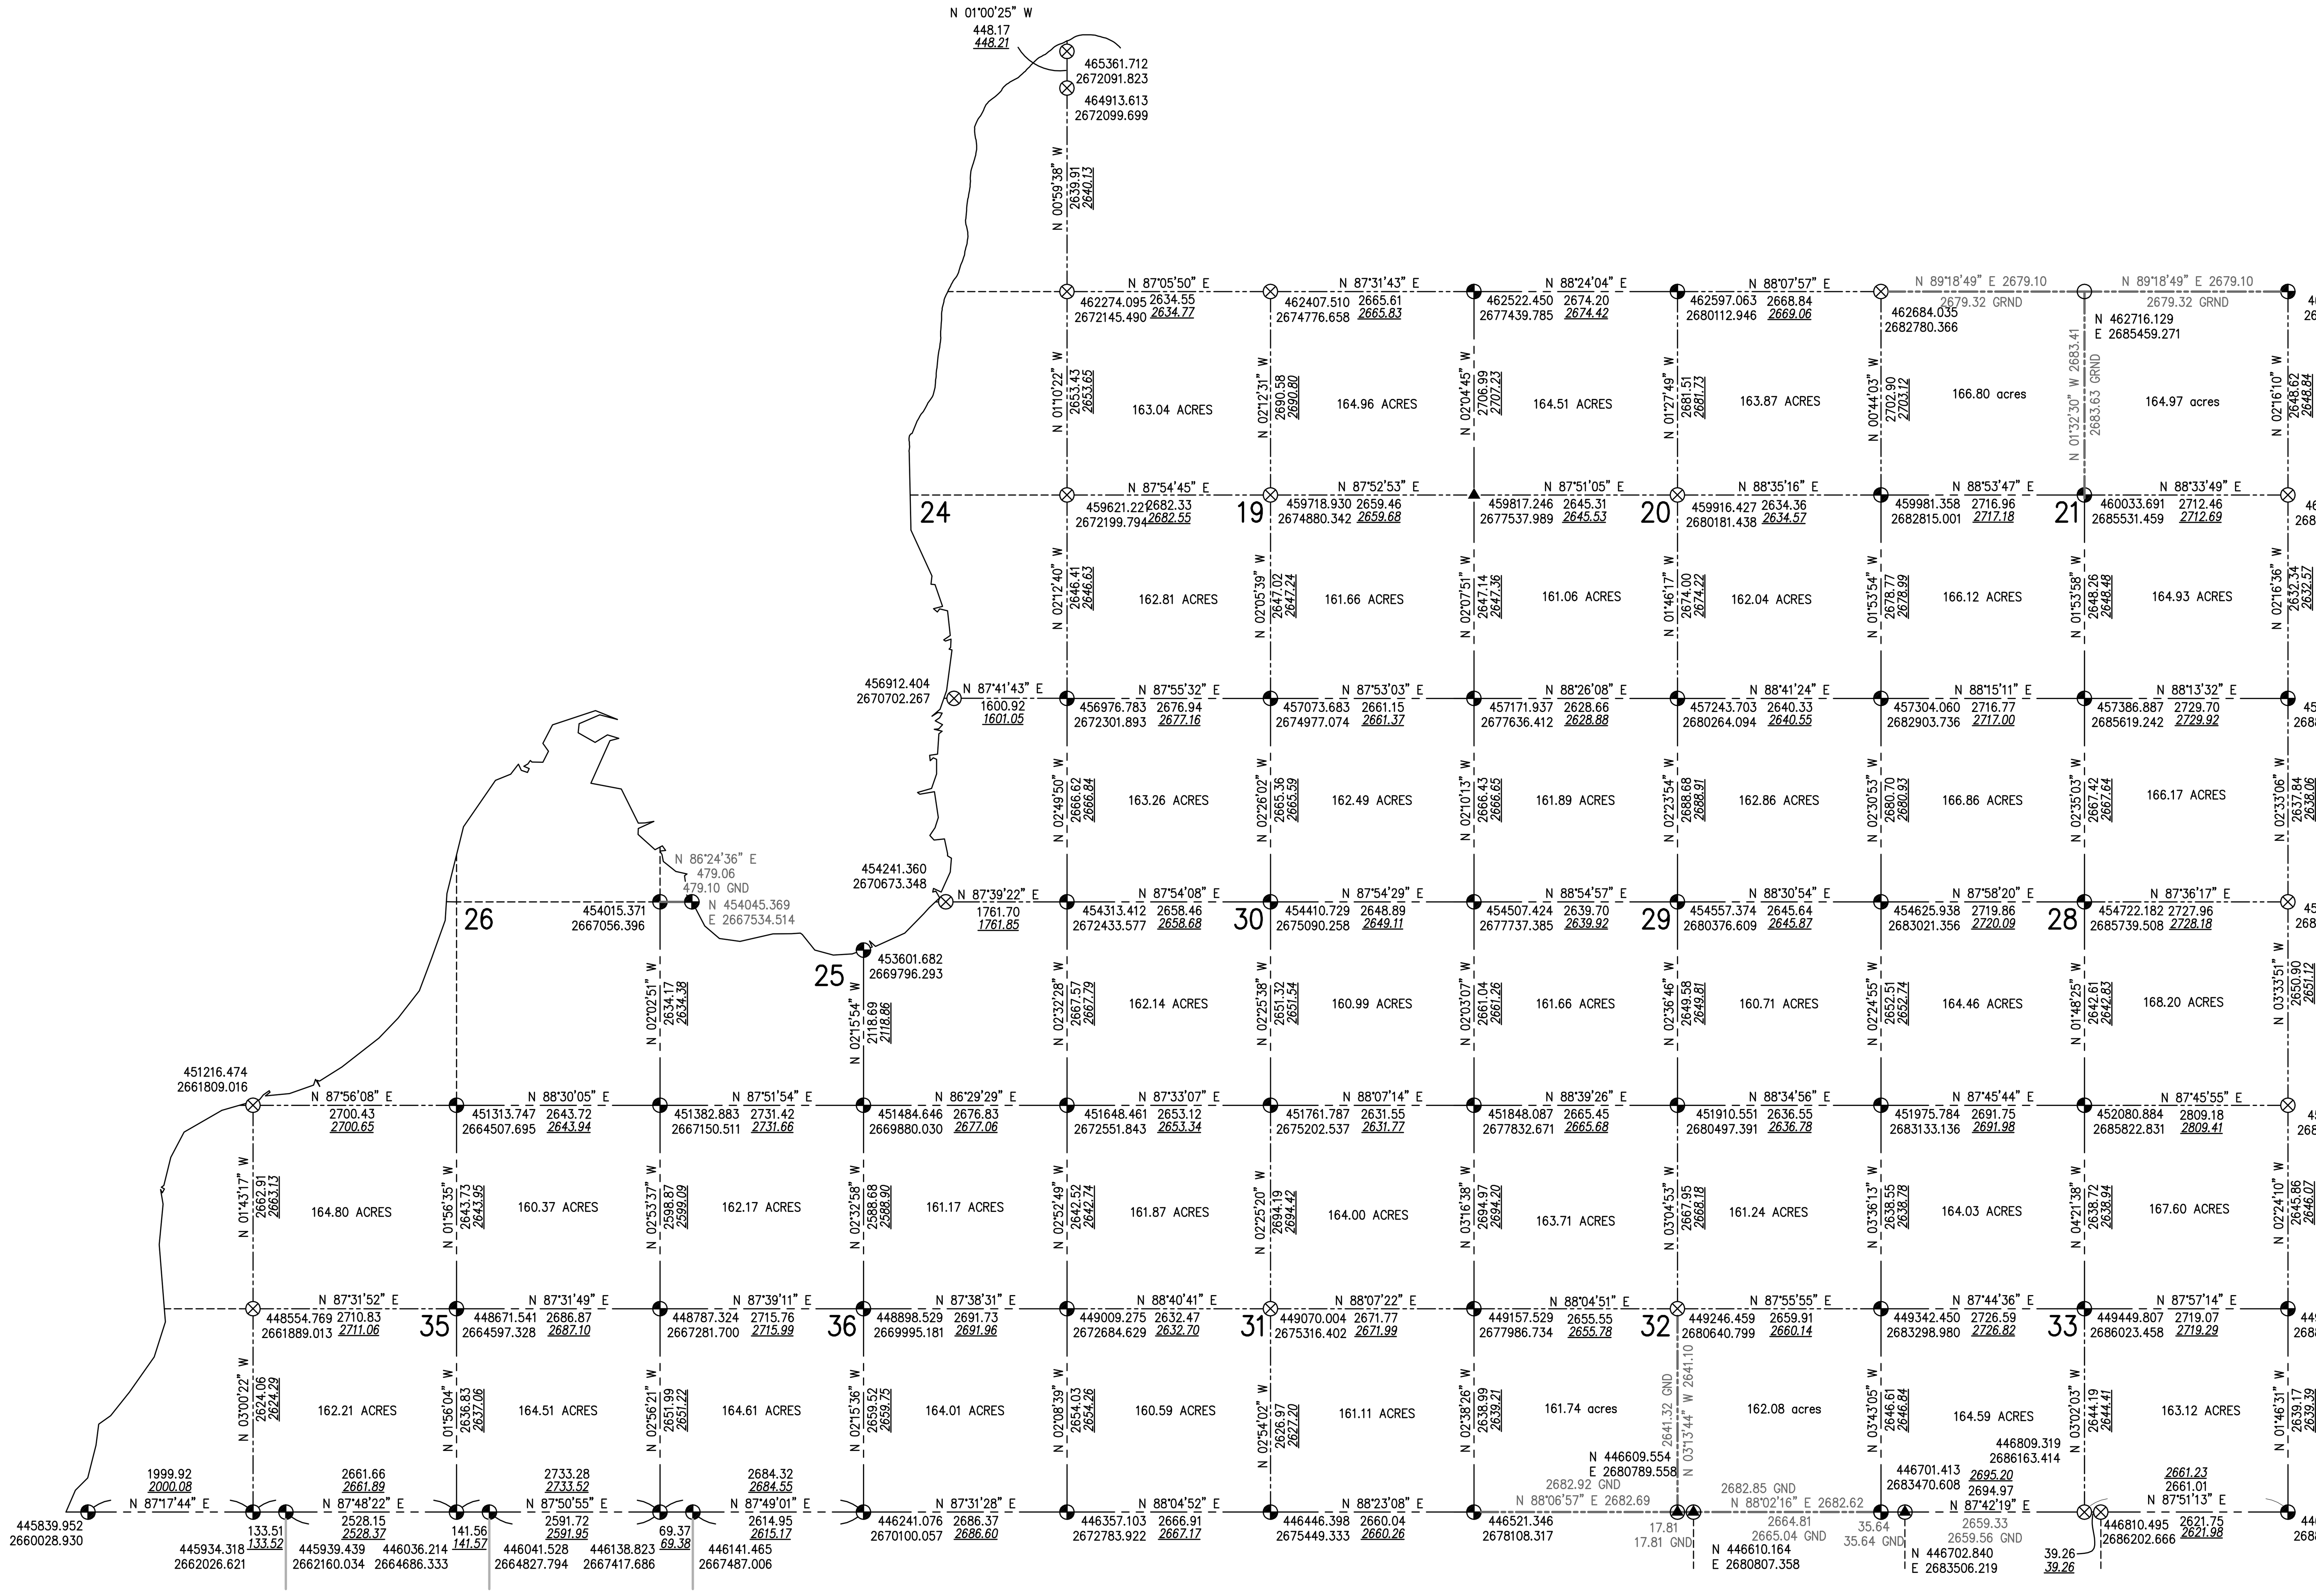

CONTROL SURVEY SUMMARY DIAGRAM
FOR
TOWN OF EGG HARBOR
TOWN 30 NORTH – RANGE 26–27 EAST
DOOR COUNTY, WISCONSIN

DRAWN BY: M. G. MC CARTY DATE: NOV. 1998
CHECKED BY: M. G. MC CARTY DATE: NOV. 1998
APPROVED BY: J. S. BAUDHUIN DATE: NOV. 1998
REVISED: M. G. MC CARTY DATE: NOV. 2000
REVISED: M. G. MC CARTY DATE: JULY 2001, JAN 2018

DOSSIER SHEETS CONTAINING ALL INFORMATION NECESSARY FOR RECOVERY AND USE OF CONTROL SURVEY STATIONS AVAILABLE FROM DOOR COUNTY REAL PROPERTY.

- U.S. PUBLIC LAND SURVEY CORNER MARKED BY BERNTSEN ALUMINUM MONUMENT WITH 4" ALUMINUM CAP : DOOR COUNTY MONUMENT
- U.S. PUBLIC LAND SURVEY CORNER (POINT SURVEYED USING GPS RTK AND CONVENTIONAL METHODS)
- U.S. PUBLIC LAND SURVEY CORNER MARKED BY BERNTSEN ALUMINUM MONUMENT WITH DISTURBED CAP : DOOR COUNTY MONUMENT
- U.S. PUBLIC LAND SURVEY CORNER COMPUTED FROM TIES
- ▲ U.S. PUBLIC LAND SURVEY CORNER NAIL (PK, MAG OR CONCRETE)
- IP U.S. PUBLIC LAND SURVEY CORNER IRON PIPE OR IRON ROD

*NOTE: ALTERNATIVE LINE TYPE AND LIGHTER WEIGHT SYMBOLS REPRESENT GPS–RTK AND CONVENTIONAL ACQUIRED DATA, ALL OTHERS WERE ACQUIRED GPS–FAST–STATIC.

HORIZONTAL DATUM IS BASED ON THE WISCONSIN STATE PLANE COORDINATE SYSTEM GRID, CENTRAL ZONE, AND ALL BEARINGS ARE REFERRED TO GRID NORTH

DIMENSIONS SHOWN IN ITALICS AND UNDERLINED INDICATE GROUND LEVEL DISTANCES

GROUND LEVEL DISTANCES ARE SCALED USING THE AVERAGE COMBINATION FACTOR FOR EACH LINE